

(19)

Deutsches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 670 125 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
04.08.1999 Bulletin 1999/31

(51) Int. Cl.⁶: A47B 83/00, A47B 96/14

(21) Application number: 95102394.4

(22) Date of filing: 21.02.1995

(54) **A modular furniture system, particularly for offices, comprising selfsupporting, multifunctional columns**

Bausatz für ein Möbelsystem, insbesondere für Büros, mit selbsttragenden, multifunktionellen Tragsäulen

Système modulaire de mobilier, en particulier de bureaux, avec des montants autoportants et multifonctionnels

(84) Designated Contracting States:
AT BE CH DE DK ES FR GB GR IE IT LI LU MC NL
PT SE
Designated Extension States:
SI

(30) Priority: 04.03.1994 IT BO940081

(43) Date of publication of application:
06.09.1995 Bulletin 1995/36

(73) Proprietor: CASTELLI S.p.A.
I-40064 Ozzano Dell'Emilia (Bologna) (IT)

(72) Inventors:
• Frascaroli, Francesco
I-40133 Bologna (IT)
• Lolli, Gianluigi
I-40139 Bologna (IT)

(74) Representative:
Provvisionato, Paolo
Provvisionato & Co S.r.l.,
Via Mascarella 85
40126 Bologna (IT)

(56) References cited:
DE-A- 2 617 213 DE-A- 3 916 095
DE-A- 4 019 839

EP 0 670 125 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a modular furniture system, particularly for offices, according to the preamble of Claim 1.

[0002] Modular office furniture systems comprising a plurality of uprights interconnected by cross-members so as together to form a support framework which is equipped with work surfaces, screens and partition walls are known.

[0003] DE-A-39 16 095 shows a furniture system comprising upright elements having radial projections and longitudinal recesses distributed peripherally on the elongate body wherein a plurality of fixtures can be coupled to the body by means of anchor brackets which can be inserted into selected slots of longitudinal arrays thereof provided on the uprights.

[0004] A disadvantage of known modular systems is that the cross-members interconnecting the uprights have to be very strong in order to withstand the stresses exerted on the support frame in use. In other words, the load-bearing structure of known furniture systems is constituted by the base frame as a whole, necessarily including the assembly of uprights and cross-members.

[0005] Another disadvantage of the known modular systems indicated above is that they have a limited degree of adaptability to specific furniture arrangements since they generally allow fixtures to be fitted solely in predetermined positions in relation to the height of the structure.

[0006] A further disadvantage of known modular systems is that it is impossible to form branches from the basic framework, for example, to form complex divisions of the spaces to be furnished without the need to duplicate the uprights at the junctions of the branches, consequently increasing the bulk of the furniture system and its overall cost.

[0007] Moreover, known modular systems do not allow the various furniture accessories in an assembled arrangement to be fully independent since the addition, removal or repositioning of one of these accessories usually necessitates the disassembly of a substantial portion of the furniture arrangement.

[0008] The object of the present invention is to overcome the disadvantages of known modular furniture systems, by providing a modular furniture system or assembly the support structure of which does not necessitate the use of cross-members with structural functions, which is highly flexible, permitting the formation of a wide range of sets of furniture, and which is simple and cheap to manufacture and assemble, ensuring that a furniture arrangement can easily be modified by the addition, elimination or repositioning of furniture even at a time after the formation of a basic set of furniture.

[0009] In order to achieve the objects explained above, the subject of the present invention is a modular furniture system, particularly for offices, whose inven-

tive features are set forth in the characterising portion of Claim 1.

[0010] An advantage of the present invention is that it provides a modular furniture system in which the number of components having structural functions is reduced to a minimum so as to reduce the costs of forming even a complex furniture arrangement.

[0011] Another advantage of the present invention is that it provides a modular furniture system which permits easy assembly of furniture arrangements with branches, both at the initial assembly stage and as a result of the extension of an existing arrangement. This modular system enables fixtures to be fitted and removed without the need to interfere with the other components making up the furniture arrangement since it is possible to form multiple connections which are independent of one another, on the same upright, with the possibility of adjusting the height positions of the fixtures continuously, at the same time ensuring good stability, strength and secure clamping of the furniture arrangement and of the individual components, even after heavy usage and with large stresses over a prolonged period of time.

[0012] The dependents claims 2 to 8 specify various embodiments of system defined in the independent claim.

[0013] Further characteristics and advantages will become clear from the description which follows with reference to the appended drawings, given purely by way of non-limiting example, in which:

Figures 1 to 3 are perspective views of an example of an office furniture structure using a modular system according to the present invention, in three different stages of assembly,

Figure 4 is a cross-section of an upright of the present invention, showing various types of connection for accessory components,

Figure 5 is a cross-section of an upright showing another type of connection,

Figures 6 to 11 are perspective views of various furniture units formed with the modular system of the present invention,

Figure 12 shows a plurality of work-surface assemblies, schematically and in perspective,

Figure 13 is a plan view of a work station,

Figure 14 is an exploded, perspective view of a work surface with an associated screen, showing a plurality of alternatives for the formation of the screen.

Figure 15 is a schematic front view showing the

modular formation of screens of different heights,

Figure 16 is a side view of a set of uprights corresponding to the uprights of Figure 15, with associated work surfaces.

[0014] With reference now to Figures 1 to 3, a furniture structure designed according to the specific requirements of a particular office is formed by the positioning of column-like uprights 1 of various heights in positions predetermined during the design of the structure and referred to below as nodal points, the ends 2 of the uprights being wide enough to allow the uprights 1 to be disposed vertically even without the aid of structural cross-members. In any case, the distances between the various uprights 1 can be adjusted precisely with the use of spacer elements such as, for example, spacer bars 3 or spacer panels 4. Balancing feet 5 can be connected to the uprights 1 in the positions in which loads which are out of balance with respect to the vertical may be expected.

[0015] Work surfaces 6 are then connected to the uprights 1 (Figure 2) to define, for example, work stations for seated people and, finally, the structure can be completed by various fixtures such as screens 7, shelves 8, suspended units 9, lamps 10, fitted panels 11 and the like to form a complete furniture structure.

[0016] The heights of all the fixtures connected to the uprights 1 are adjustable continuously as will become clearer from the following description, so that it is possible, for example, to provide partial separation screens 7a or work surfaces 6a at personalized heights, either in predetermined fixed positions or in positions which can be adjusted by the user, according to choice.

[0017] With reference now to Figure 4, each upright 1, which is preferably formed from an extruded aluminium section or beam, has a cross-shaped overall cross-section with four identical arms 12 disposed radially at 90° to one another, extending from four corresponding lobes 13a of a longitudinally hollow central core 13. Each arm 12 has a hollow, bell-shaped cross-section having a base wall 14a integral with a respective lobe 13a of the central core 13, and two opposite concave sides 14b, joined together by an end wall 14c with a semicircular cross section, disposed at the end of the arm 12 farthest from the core 13. Essentially, the peripheral profile of the cross-section of the generic upright 1 has a square configuration with rounded corners constituted by the end walls 14c together with concave sides constituted by the two sides 14b of two adjacent arms 12.

[0018] Two opposed longitudinal grooves 15 are formed on the two sides 14b of each arm 12. Two curved appendages 16 define a longitudinal channel 17 with a broken circular cross-section on the internal surface of the end wall 14c. The base walls 14a of two adjacent arms 12 and the portion of the wall of the central core 13 between the two corresponding lobes 13a together define a longitudinal slot 23 with a substantially

trapezoidal cross-section, the smaller base of which corresponds to the opening of the slot.

[0019] The longitudinal edges of a flexible finishing shell A, indicated in chain line in Figure 4, can be inserted in two facing longitudinal grooves 15 of two adjacent arms 12 so as to define a covered longitudinal chamber through which, for example, electrical or data-transmission cables can extend.

[0020] The shape of the upright 1 is such that it can be coupled with a plurality of connection elements, shown by way of example in Figure 4, for connecting various fixtures to the upright 1 in longitudinal positions which can be selected and adjusted continuously, as shown in the example of a furniture structure in Figure 3.

[0021] In particular, a connection element 18 with jaws which can be associated, for example, with a foot 5, comprises two opposed half-shells 18a the complementary damping surfaces 18b of which together reproduce the semicircular profile of the end wall 14c of an arm 12. Each half-shell 18a terminates in a hooked appendage 19 which, in the fitted condition shown in the drawing, is partially engaged in a corresponding longitudinal groove 15 when the two half-shells are clamped together by means, for example, of screws. In this condition, the clamping surfaces 18b grip the end wall 14c of the arm 12 like a clamp, clamping the associated fixture, in particular, the foot 5.

[0022] A tensile connection element 20 used, for example, for fixing the spacer bars 3 or the spacer panels 4, comprises an engagement element 21 terminating in two appendages 21a which can be slid into the longitudinal grooves 15 of an arm 12. A threaded pin 22 mounted in the base wall 21b of the engagement element 21 is screwed into a nut 22b welded to the base wall 21b. A hexagonal seat is formed at one end of the threaded pin 22 for the engagement of a hexagonal key and a pressure element 22a is mounted rotatably on the opposite end. Rotation of the pin 22 clamps the pressure element 22a against the outer surface of the end wall 14c. Naturally, the nut 22b and the threaded pin 22 could be replaced by a similar device, for example, such as a cam or eccentric system, which selectively clamps the pressure element 22a against the arm 12.

[0023] A variant 20a of the tensile connection element 20, particularly suitable for the connection of screens 7, also comprises an engagement element 21, the appendages 21a of which can be coupled with two respective longitudinal grooves 15. The internal chamber which, in the assembled condition, is defined by the internal walls of the engagement element 21 and the end wall 14c of an arm 12 houses a wedge-like pressure element 22b, preferably of plastics material, having a flat rear wall which bears on the end wall 21b and a substantially C-shaped opposite wall for pushing against the end wall 14c of the arm 12. The wedge-like element 22b is tapered longitudinally, that is, perpendicular to the plane of the drawing, so that it can be forced releasably against the arm 12 to fix the screen 7 to the

upright 1 at a certain height.

[0024] Another type of tensile connection element which can be associated with a longitudinal slot 23 comprises an engagement element 24 with a substantially trapezoidal cross-section in which threaded holes are formed for the engagement of tension screws 25. The heads 25a of the tension screws 25 are fitted inside hollow portions of fixtures such as brackets 37a, 37b for supporting work surfaces. The brackets 37a, 37b can be clamped against the outer surfaces of the sides 14b of two adjacent arms 12 by action on the heads 25a of the tension screws 25, so that the inclined faces of the engagement element 24 push against corresponding portions of the base walls 14a of the two adjacent arms 12.

[0025] The orientation of the fixtures associated with the various connection elements shown in Figure 4 relative to the axes of the arms 12 of the generic upright 1 does not depend upon the type of connection element used. In fact, connection elements of the same type can be used for connecting fixtures to the upright 1 in various orientations relative to the axis of an arm 12, for example, such as the angled bracket 37a or the parallel bracket 37b shown in Figure 4. Moreover, for a generic connection element, an articulated joint, for example, a ball-and-socket joint can be connected for the mounting of arms supporting orientable lamps, shelves and the like.

[0026] In addition to the possibilities for the longitudinal connection of fixtures to the upright 1 by means of the connection elements shown in Figure 4, it is also possible to make use of the arrangement of the cross-section of the upright to connect fixtures to the ends of the upright. In particular, the central hollow core 13, the hollow portions 14d of the arms 12 and the longitudinal channels 17 can house coupling elements carrying radial expansion means for clamping the coupling elements against the side walls of the cavities.

[0027] An example of an expansion connection is shown in Figure 5. Two flexible wings 50, each having two end portions 50a disposed at 90° to one another for engaging in adjacent lobes of the central core 13 are fixed to the fixture to be fixed to the end of the upright 1. The ends 50a are interconnected by a central portion 50b which is oriented at 45° to each of the ends 50a. The conical end 51a of a transverse pressure grub screw 51 screwed into a threaded hole in one of the central portions 50b engages a seat in the other central portion 50b. A hexagonal wrench can be inserted through a hole 52 provided at a predetermined distance from the end of the upright 1 to screw or unscrew the grub screw 51 and consequently to clamp or release the expansion connection element inside the cavity of the central core 13.

[0028] Moreover, the longitudinal channels 17 may be partially threaded for the threaded connection of fixtures mounted on the ends of the uprights 1.

[0029] Since each upright element 1 is structurally

self-supporting, a single upright may be selected as the basic element for the formation of a minimal furniture arrangement. Figure 6 shows, by way of example, a set of furniture in a minimal arrangement for forming a standard lamp. A base 26 and a lighting body 27 are connected to the respective ends of the upright 1.

[0030] Figure 7 shows a set of furniture in a minimal arrangement for forming a coat stand, in which coat-hook accessories 28 and umbrella-holder accessories 29 are connected longitudinally, by means of one of the longitudinal connection elements described above with reference to Figure 4, to the upright 1 provided with the base 26. The heights of the coat-hooks 28 and umbrella-holders 29 are therefore adjustable.

[0031] Figures 8, 9 and 10 show three examples of tables comprising single uprights 1 and various work surfaces, that is, a shaped surface 30, a round surface 31 and a fitted surface 32 suitable, for example, for holding office machines, respectively. All of the surfaces 30, 31 and 32 are fixed to the tops of the uprights 1.

[0032] Figure 11 shows an example of a table with four legs formed by uprights 1 to the tops of which a rectangular surface 30a is fixed.

[0033] Alternatively, several uprights 1 may be selected to constitute the support for complex arrangements of work surfaces, tables, desks and the like. In these arrangements, the same upright 1 may act as a common support for two or more adjacent work surfaces so as to constitute a nodal point which can be further equipped to constitute a complete furniture system.

[0034] Figure 12 shows some non-limiting examples of such work-surface arrangements, in particular:

in Figure 12a) two uprights 1 support a rectangular surface 33 and an extension 34 of the surface 33,

in Figure 12b) three uprights 1 support a shaped surface 35 and an extension 34,

in Figure 12c) four uprights 1 support two adjacent shaped surfaces 35,

in Figure 12d) five uprights 1 support four adjacent shaped surfaces 35 to form an island work station,

in Figure 12e) five uprights 1 support a combination of rectangular surfaces, shaped surfaces 35 and extensions 34 in an overall T-shaped arrangement.

in Figure 12f) six uprights 1 act as support elements for a C-shaped arrangement of work surfaces,

In Figure 12g) four uprights of a C-shaped arrangement, also including semi-circular end surfaces 36, extend upwards to support three shelves 8,

in Figure 12h) the uprights of an island work station such as 12d) extend upwards for the connection of four screens 7; in particular, the central upright acts

as a nodal point for the simultaneous connection of the four shaped surfaces 35 and of the four screens 7.

in Figure 12i) four of the five uprights 1 of a C-shaped arrangement of work surfaces extend upwards to support screens 7, shelves 8 and a suspended unit 9.

[0035] Figure 13 shows the example 12b of Figure 12 in greater detail. The vertical planes in which two adjacent uprights 1 lie are generally the planes of the structure with maximum bending stress. The assembly arrangement of the surface 35 and of the uprights 1 is such that the latter always have one of their cross-sections with greatest bending strength, defined by one of the two perpendicular axes along which two opposed pairs of arms 12 are directed, oriented for withstanding the maximum bending stress of the structure.

[0036] The shaped surface 35 is preferably connected to the uprights 1 with the interposition of the support brackets 37 fixed to the upright by means of one of the connection elements described above with reference to Figure 4.

[0037] The surface extension 34, which is also fixed to the uprights 1, is mounted with its longer side beside one of the straight sides of the shaped surface 35 to form a continuous work surface. More generally, each of the surfaces 33, 34, 35, 36 of Figure 12 can be placed beside another surface to form continuous flat surfaces of larger dimensions. The need to provide finishing strips for filling gaps between adjacent surfaces is thus eliminated.

[0038] Holes 38 which can be uncovered selectively are incorporated in the shaped surface 35 and, in general, in each work surface, to permit the passage of cables for data-transmission or electrical connections where necessary, as is also shown by way of example in Figure 3.

[0039] The arrangements which can be achieved with the modular system of the present invention, which are shown in particular in Figures 3, 12 and 13, can be extended or modified even after the completion of a particular set of furniture without the need to disassemble the pre-existing structure. For example, another shaped surface P, shown in broken outline in Figure 13, may be placed beside the shaped surface and fixed to two of the same uprights 1 supporting the first shaped surface 35 with the use of one or more of the slots or longitudinal grooves which are free on the uprights, for the connection.

[0040] With reference now to Figure 14, in a preferred embodiment, each upright 1 may comprise a lower portion 1a of a height equal to a predefined standard height of a work surface 33 for a person in a seated position and one or more upright portions 1b which can selectively be engaged on one another and on the lower portion 1a to increase the overall height of the individual

upright 1 so as to provide support for fixtures disposed at standard heights above the work surface, for example, such as the screens 7. The upright portions 1b are engaged on the lower portion 1a or on another portion 1b by means of expansion couplings 39, for example, of the type shown in Figure 5, which engage the cavity inside the central core 13. The last portion of the upright element 1 can be closed at the top by a removable closure plug 40.

[0041] In a preferred embodiment, each screen 7 comprises a rectangular support framework 7a of which the vertical sides which are intended to be connected to the arms 12 of the uprights 1 carry one of the connection elements shown in Figure 4, preferably the tensile connection element 20a. The opposite flat faces of the framework 7a can be covered, for example, by the inserting or jointing finishing panels 7b, for example, interchangeable drilled panels of wood, fabric, plastic-coated sheet metal, glass, windows or the like.

[0042] The appendages 21a of the tensile connection element 20a including the wedge-like pressure element 22b are inserted in the corresponding longitudinal grooves 15 of an arm 12 of the upright 1 so that the support framework 7a can slide vertically on the uprights 1 and can be clamped selectively thereto at an adjustable height. A plurality of frameworks 7a can be mounted on the same two uprights 1 to form screens of different heights, as shown in Figures 15 and 16.

Claims

1. A modular furniture system, particularly for offices, comprising:

- at least one column-like upright element (1) having a body which is elongate along a principal axis and two opposite ends substantially perpendicular to the principal axis, the at least one upright element (1) comprising engagement means distributed peripherally on the elongate body about the principal axis and defining a plurality of coupling axes disposed symmetrically with respect to the principal axis;
 - a plurality of fixtures (3, 4, 5, 6, 7, 8, 9, 10, 11), which can be coupled selectively to the ends or to the body of the at least one upright element (1) to form a furniture arrangement;
 - connection elements (18, 20, 20a, 24) for connecting the fixtures to the at least one column-like upright element (1) in longitudinal positions;
- characterized in that
- the positions in which the fixtures are coupled to the body of the at least one upright element (1) are adjustable continuously along the principal axis, so that the heights of all the fixtures connected to the upright are adjustable continuously;

- the orientation of the fixtures associated with the various connection elements being independent of the type of connection element used.
- 2. A modular furniture system according to Claim 1, characterized in that it comprises a single column-like upright element (1).
- 3. A modular furniture system according to Claim 1, characterized in that the engagement means comprise radial projections (12) alternating with recesses (23).
- 4. A modular furniture system according to Claim 3, characterized in that the cross-section of the radial projections (12) shows a configuration comprising four symmetrical, bell-shaped arms (12) in a cross-like arrangement, connected to a central core (13), base wall portions (14a) of adjacent arms (12) defining, with a portion of the central core (13), the recesses which extend along the entire body of the upright element (1) in the form of longitudinal slots (23).
- 5. A modular furniture system according to Claim 4, characterized in that longitudinal grooves (15) are formed on opposite sides (14b) of the arms (12).
- 6. A modular furniture system according to Claim 5, characterized in that the connecting elements for connecting the fixtures to the bodies of the upright elements (1) are selectively connectable to the bell-shaped arms (12), to the grooves (15), or to the longitudinal slots (23).
- 7. A modular furniture system according to Claim 6, characterized in that it comprises engagement and expansion connection means which can be coupled selectively with a cavity of the central core (13), with cavities (14d) or with longitudinal channels (17) of the arms (12) to connect fixtures to the ends of the upright element (1).
- 8. A modular furniture system according to Claim 1, characterized in that one end (2) of the at least one column-like upright element (1) is wide enough to allow the column-like element to be disposed vertically even without the aid of structural cross-members.

Patentansprüche

1. Modular aufgebautes Möbelsystem, insbesondere für Büros, mit
 - mindestens einem säulenartigen, aufrecht stehenden Element (1), das einen Körper, der sich

entlang einer Hauptachse erstreckt, und zwei sich gegenüberliegende, zur Hauptachse im wesentlichen rechtwinklige Enden aufweist, wobei das mindestens eine aufrecht stehende Element (1) Mittel zum Eingreifen aufweist, die an der Außenseite des Körpers um die Hauptachse verteilt angeordnet sind und die eine Vielzahl von Verbindungsachsen bilden, die symmetrisch hinsichtlich der Hauptachse angeordnet sind;

- einer Vielzahl von Befestigungselementen (3, 4, 5, 6, 7, 8, 9, 10, 11), die wahlweise an den Enden oder an dem Körper des mindestens einen aufrecht stehenden Elementes (1) befestigbar sind, um eine Möbelanordnung zu bilden;

- Verbindungselemente (18, 20, 20a, 24) zur Verbindung der Befestigungselemente mit dem mindestens einen säulenartigen, aufrecht stehenden Element (1) in Längspositionen; **dadurch gekennzeichnet,**

- daß die Positionen, in denen die Befestigungselemente mit dem Körper des mindestens einen aufrecht stehenden Elementes (1) verbunden sind, entlang der Hauptachse stufenlos einstellbar sind, so daß die Höhe aller mit dem Element verbundenen Befestigungselemente stufenlos einstellbar ist, und

- daß die Ausrichtung der Befestigungselemente, die den verschiedenen Verbindungselementen zugeordnet sind, unabhängig von der Art der verwendeten Verbindungselemente ist.

2. Modular aufgebauten Möbelsystem nach Anspruch 1, **dadurch gekennzeichnet,** daß es ein einzelnen säulenartiges, aufrecht stehendes Element (1) aufweist.

3. Modular aufgebautes Möbelsystem nach Anspruch 1, **dadurch gekennzeichnet,** daß die Mittel zum Eingreifen sich radial erstreckende Vorsprünge (12) aufweisen, die wechselweise mit Ausnehmungen (23) aufeinanderfolgen.

4. Modular aufgebautes Möbelsystem nach Anspruch 3, **dadurch gekennzeichnet,** daß der Querschnitt der sich radial erstreckenden Vorsprünge (12) eine Anordnung besitzt, die vier symmetrische, glockenförmige Arme (12), die kreuzweise angeordnet und mit einem mittigen Zentralstück (13) verbunden sind, sowie Hauptwandteile (14a) von benachbarten Armen (12) aufweist, die zusammen mit einem Teil des mittigen Zentralstücks (13) Ausnehmungen bilden, die sich entlang des gesamten Körpers des

aufrecht stehenden Elementen (1) in Form von länglichen Nuten (23) erstrecken.

5. Modular aufgebautes Möbelsystem nach Anspruch 4, **dadurch gekennzeichnet**, daß längliche Nuten (15) an gegenüberliegenden Seiten (14b) der Arme (12) ausgebildet sind.

6. Modular aufgebautes Möbelsystem nach Anspruch 5, **dadurch gekennzeichnet**, daß die Verbindungselemente zur Verbindung der Befestigungselemente mit den Körpern der aufrecht stehenden Elemente (1) wahlweise mit den glockenförmigen Armen (12), mit den Nuten (15) oder mit den länglichen Nuten (23) verbindbar sind.

7. Modular aufgebautes Möbelsystem nach Anspruch 6, **dadurch gekennzeichnet**, daß es Mittel zum Eingreifen und Erweitern aufweist, die wahlweise mit einem Hohlraum des Zentralstücks (13), mit Hohlräumen (14d) oder mit länglichen Kanälen (17) der Arme (12) verbindbar sind, um die Befestigungselemente mit den Enden des aufrecht stehenden Elementes (1) zu verbinden.

8. Modular aufgebautes Möbelsystem nach Anspruch 1, **dadurch gekennzeichnet**, daß ein Ende (2) des mindestens einen säulenartigen, aufrecht stehenden Elementes (1) ausreichend breit ausgebildet ist, damit das säulenartige Element ohne Unterstützung eines gekreuzten Elementes vertikal angeordnet werden kann.

Revendications

1. Un système modulaire de mobilier, particulièrement destiné à des bureaux, comprenant :

- au moins un élément montant (1) analogue à une colonne, ayant un corps allongé sur un axe principal et deux extrémités opposées sensiblement perpendiculaires à l'axe principal, le au moins un élément montant (1) comprenant des moyens de mise en prise répartis en périphérie sur la corps allongé autour de l'axe principal et définissant une pluralité d'axes de couplage disposés symétriquement par rapport à l'axe principal;
- une pluralité de fixations (3, 4, 5, 6, 7, 8, 9, 10, 11), pouvant être couplées sélectivement aux extrémités ou au corps du au moins un élément montant (1) pour constituer un agencement de mobilier,
- des éléments de liaison (18, 20, 20a, 24) destinés à assurer la liaison entre les fixations du au moins un élément montant (1) analogue à une colonne, en des positions longitudinales; caractérisé en ce que

- les positions auxquelles les fixations sont couplées au corps du au moins un élément montant (1) sont ajustables de façon continue sur l'axe principal, de manière que les hauteurs de la totalité des fixations reliées à l'élément montant soient ajustables de façon continue;
- l'orientation des fixations associées aux divers éléments de liaison étant indépendante du type d'éléments de liaison utilisés.

2. Un système modulaire de mobilier selon la revendication 1, caractérisé en ce qu'il comprend un unique élément montant (1) analogue à une colonne.

3. Un système modulaire de mobilier selon la revendication 1 caractérisé en ce que les moyens de mise en prise comprennent des saillies radiales (12) alternant avec des cavités (23).

4. Un système modulaire de mobilier selon la revendication 3, caractérisé en ce que la section transversale des saillies radiales (12) est d'une configuration comprenant quatre bras (12) symétriques en forme de cloche, placés dans un agencement analogue à un croix, reliés à un noyau central (13), des parties de Paroi de base (14a) de bras (12) adjacents définissant, avec une partie du noyau central (13), les cavités qui s'étendent sur la totalité du corps de l'élément montant (1), sous la forme de fentes longitudinales (23).

5. Un système modulaire de mobilier selon la revendication 4, caractérisé en ce que des rainures longitudinales (15) sont formées sur des côtés opposés (14b) des bras (12).

6. Un système modulaire de mobilier selon la revendication 5, caractérisé en ce que les éléments de liaison destinés à relier les fixations aux corps des éléments montants (1) sont susceptibles d'être reliés sélectivement au bras (12) en forme de cloche, aux rainures (15) ou aux fentes longitudinales (23).

7. Un système modulaire de mobilier selon la revendication 6, caractérisé en ce qu'il comprend des moyens de liaison par mise en prise et expansion, pouvant être couplés sélectivement à une cavité du noyau central (13), à des cavités (14) ou à des canaux longitudinaux (17) des bras (12) pour relier les fixations aux extrémités de l'élément montant (1).

8. Un système modulaire de mobilier selon la revendication 1, caractérisé en ce qu'une extrémité (2) du au moins élément montant (1) analogue à une colonne est suffisamment large pour permettre à l'élément analogue à une colonne d'être disposé



13

EP 0 670 125 B1



14

verticalement, même sans l'aide d'organes transversaux structurels.

5

10

15

20

25

30

35

40

45

50

55

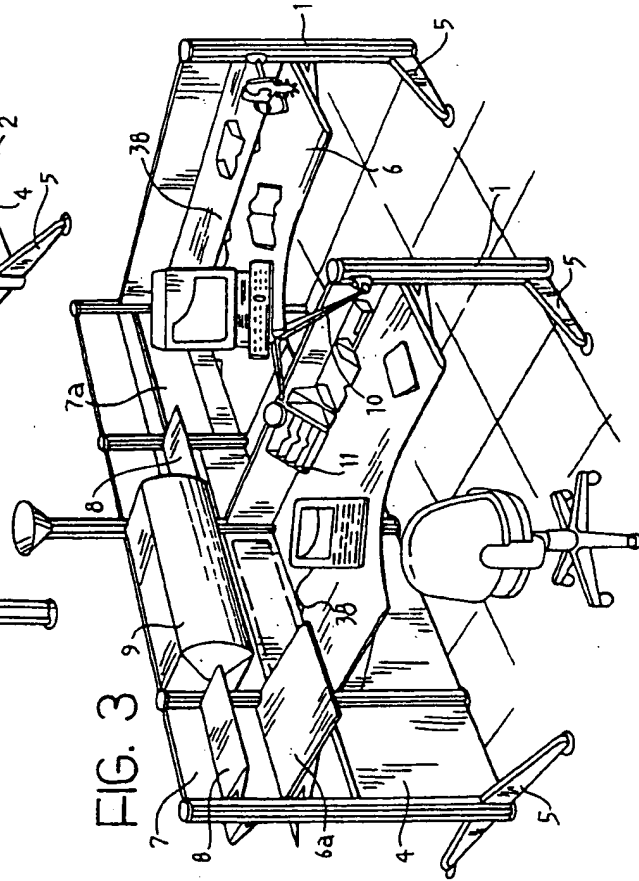
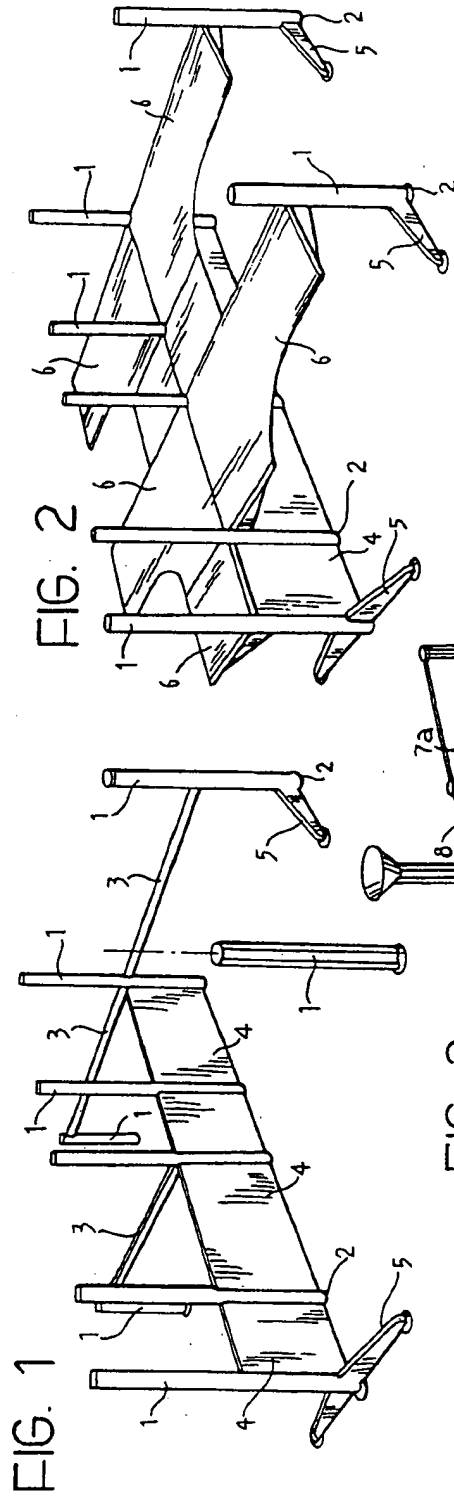


FIG. 4

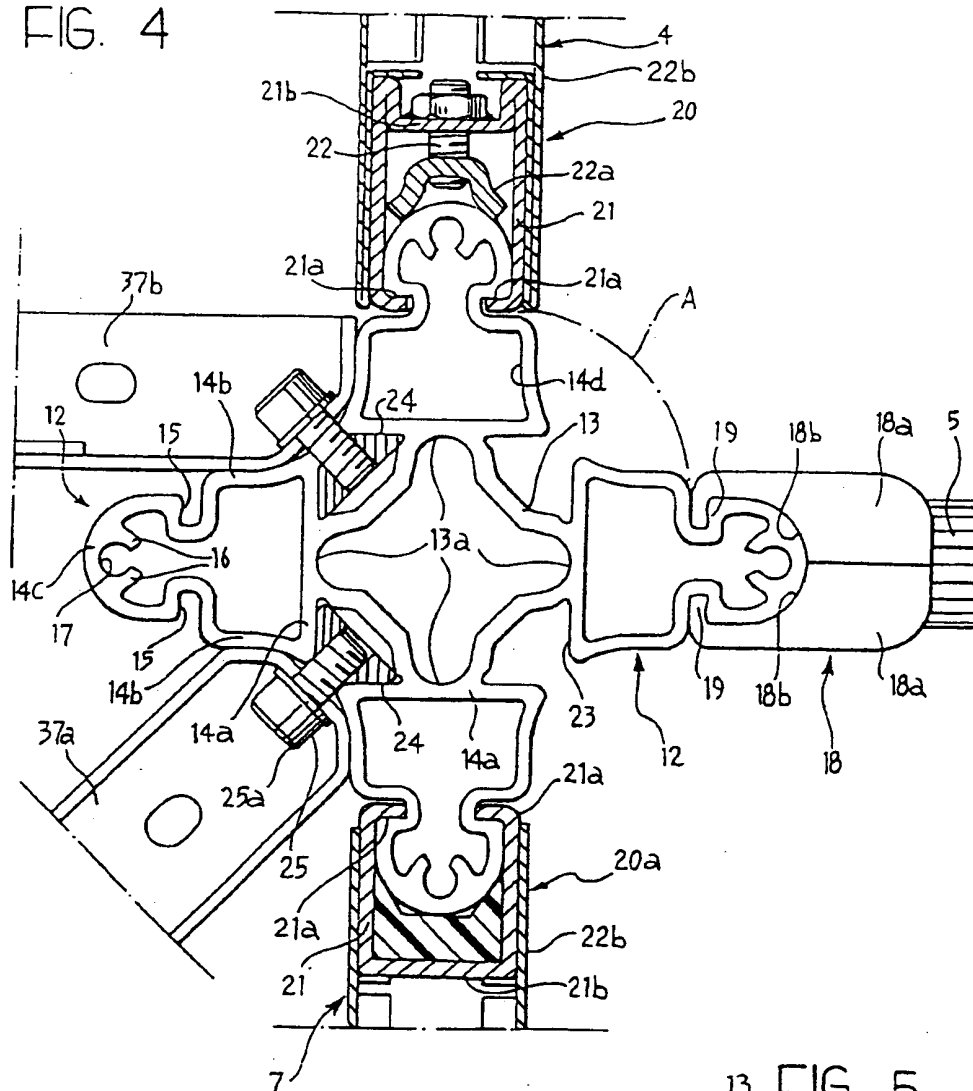


FIG. 5

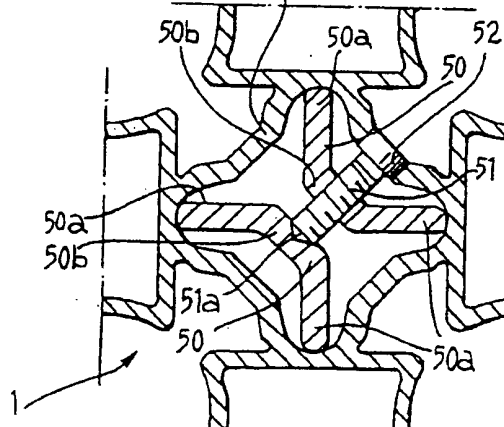


FIG. 6

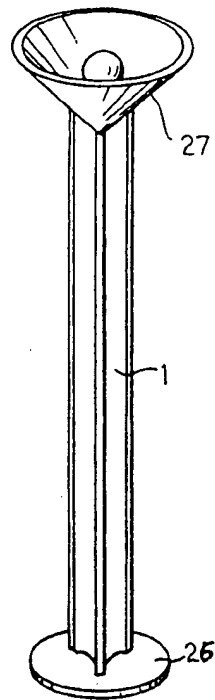


FIG. 7

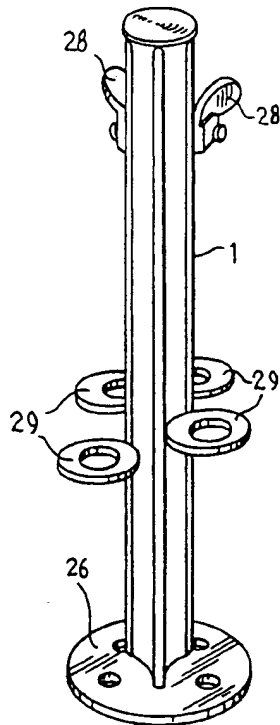


FIG. 9




FIG. 11

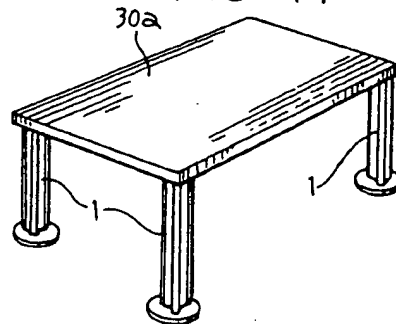


FIG. 10

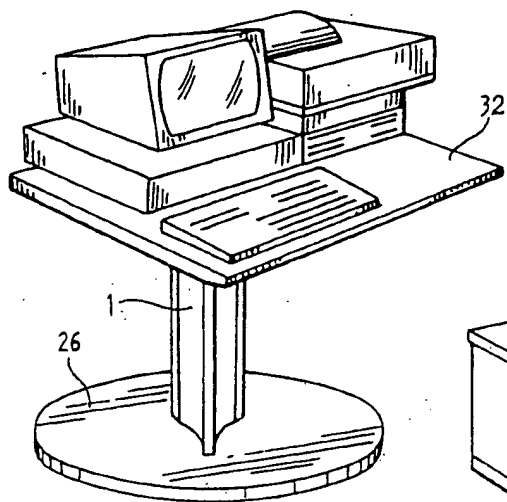
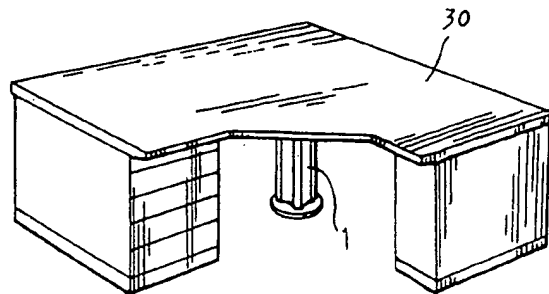


FIG. 8



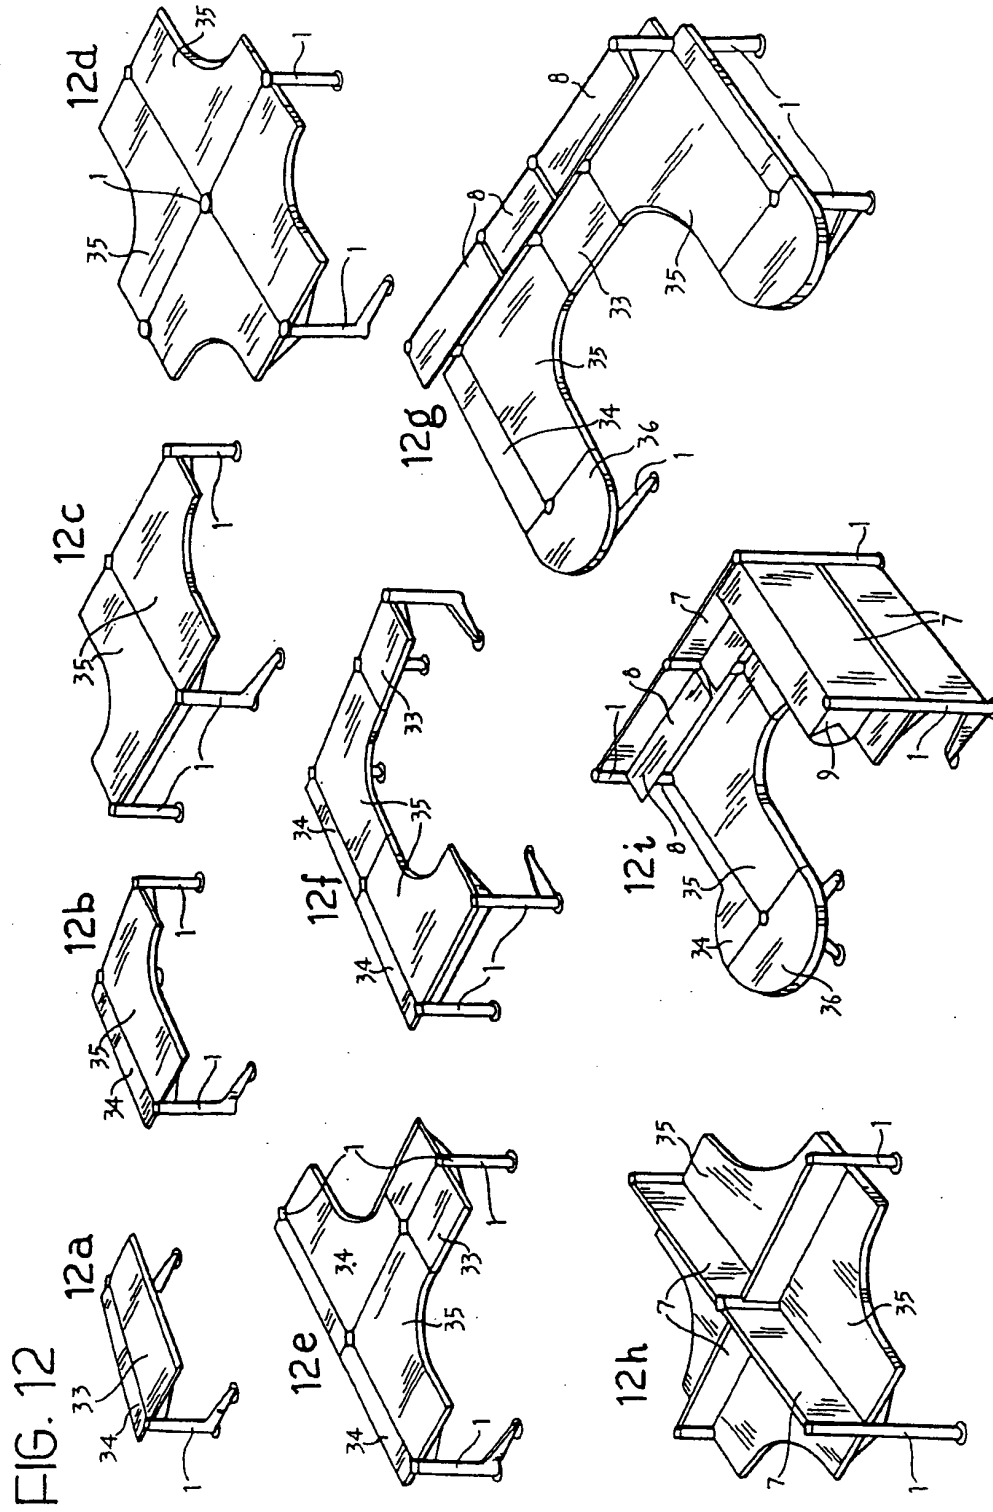


FIG. 13

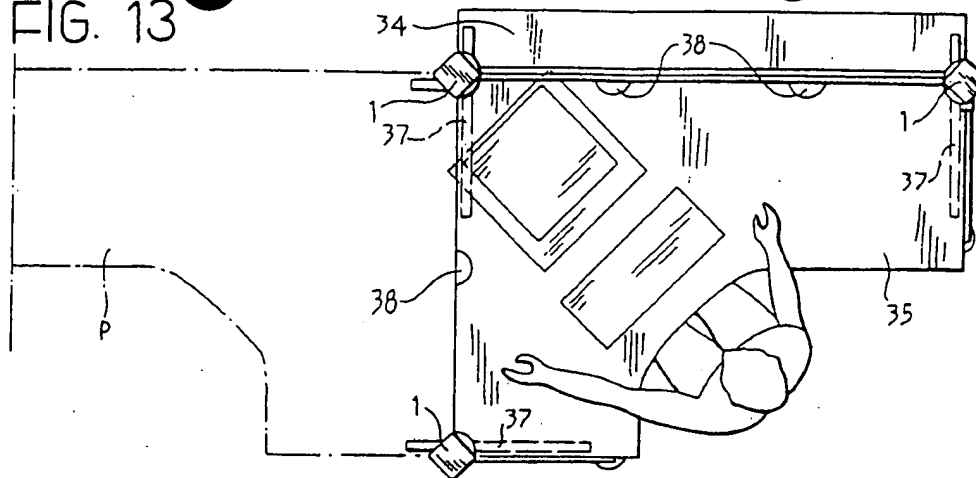
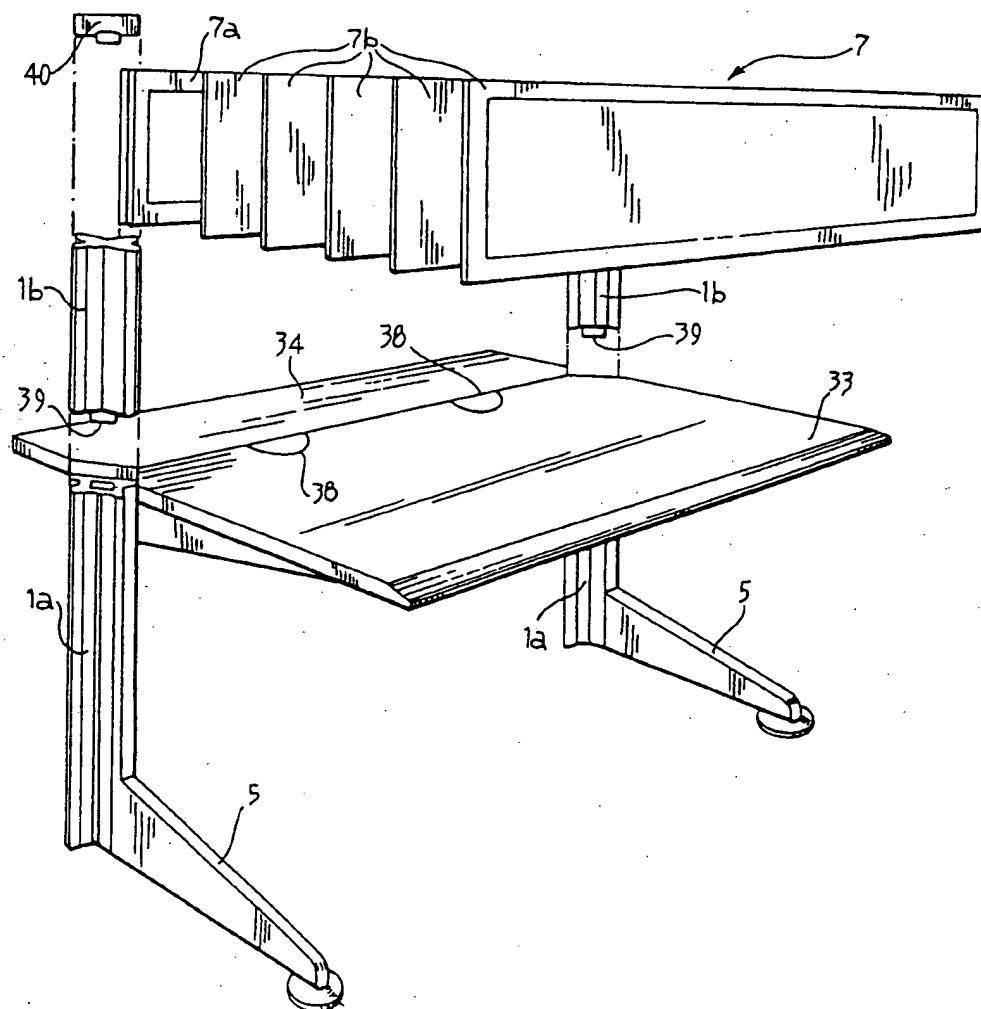


FIG. 14



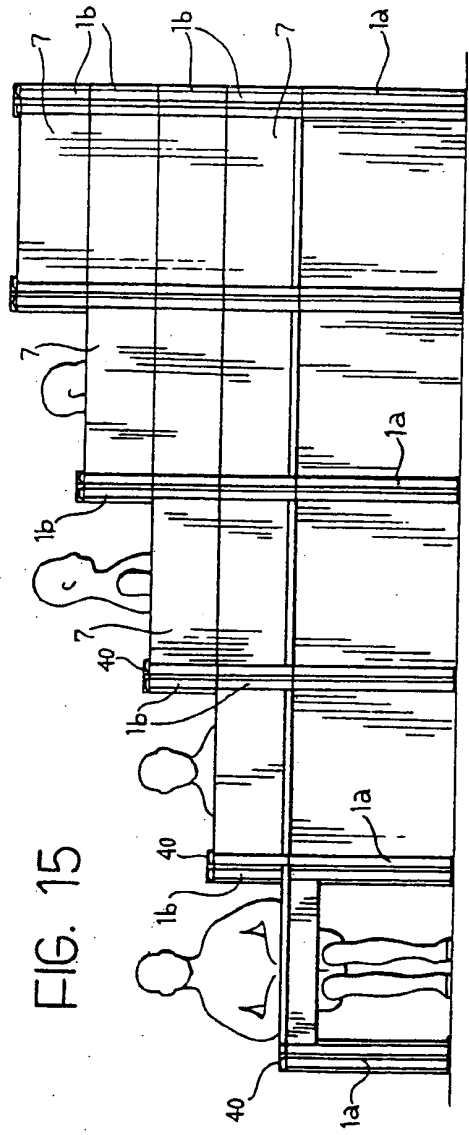


FIG. 15

FIG. 16

